ELECTRIC RT SCISSOR LIFT

SPECIFICATIONS

MODELS	SR0818E-2	
Measurements	Metric	Imperial
Work Height Max.	9.8m	32'2"
Ⓐ Platform Height - Raised	7.8m	25'7"
Platform Height - Stowed	1.45m	4'9"
Ⓑ Platform Length	2.79m	9'2"
Ⓒ Extension Deck	1.52m	5'
Ⓓ Platform Length with Extension Deck	4.31m	14'2"
Ⓔ Platform Width	1.6m	5'3"
Ⓕ Overall Length	3.76m	12'4"
Ⓖ Overall Width	1.79m	5'10"
Ⓗ Overall Height - Rails up	2.55m	8'4"
Overall Height - Rails down	1.89m	6'2"
Ⓘ Wheelbase	2.3m	7'7"
Ground Clearance	0.24m	9"
PRODUCTIVITY		
Max. Platform Occupancy (in/out)	4 / 4	
Platform Capacity	680kg	1,499 lbs
Platform Capacity - Extension	140kg	309 lbs
Drive Height	Full Height	
Gradeability - Stowed	35%	
Min. Turning Radius	2.46m	8'1"
Raise/Lower Speed	35 / 30s	
Drive Mode	Four-wheel drive	
Tire Type	Foam-filled tire	
Tire Size	663x283mm	26"x11"
POWER		
Power Source	72V 120Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Volume	50L	13.2gal
WEIGHT		
Machine Weight	4,190kg	9,237 lbs

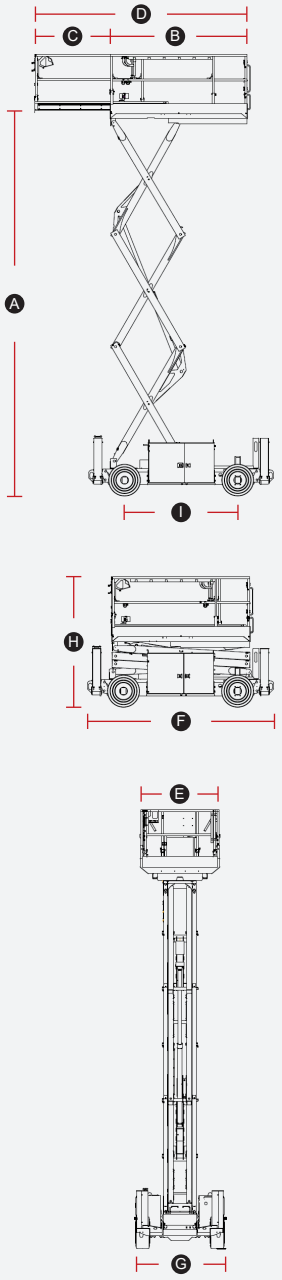

Please contact LGMG or a local dealer for more details.
LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LGMG
RELIABILITY IN ACTION

www.lgmglifts.com

LINGONG HEAVY MACHINERY CO., LTD.
Address: No. 2676, Kejia Road, Jinan, Shandong, China
Email: sales@lgmg.com.cn Tel: +86 531 6787 9283