SCISSOR LIFT RANGE

SPECIFICATIONS

MODELS	S1212E-2	
Measurements	Metric	Imperial
Work Height Max.	14/9.5m (in/out)	45'11"/31'2" (in/out)
Ⓐ Platform Height-Raised	12/7.5m (in/out)	39'4"/24'7" (in/out)
Ⓑ Platform Length	2.26m	7'5"
Ⓒ Extension Deck	0.9m	2'11"
Ⓓ Platform Length With Extension Deck	3.16m	10'4"
Ⓔ Platform Width	1.12m	3'8"
Ⓕ Overall Length	2.43m	8'
Ⓖ Overall Width	1.19m	3'11"
Ⓗ Overall Height-Guardrails Up	2.65m	8'8"
Ⓘ Overall Height-Guardrails Down	1.84m	6'
Ⓙ Wheelbase	1.85m	6'1"
Ground Clearance(Stowed/Raised)	100/20mm	4"/ 0.8"
PRODUCTIVITY		
Max. Platform Occupants (in/out)	2 (in) / 1(out)	
Platform Capacity	320kg	705 lbs
Platform Capacity-Extension Deck	120kg	265 lbs
Drive Height	Full Height	
Gradeability-Stowed	25%	
Min. Turning Radius	2.7m	8'10"
Raise/Lower Speed	65s / 60s	
Brakes	Front-wheel Brake	
Drive Mode	4x2	
Tire Type	Solid Non-marking	
Tire Size	380x130mm	15"x5"
POWER		
Lead-acid Battery	24V(4×6V),190Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Capacity	21L	5.5gal
WEIGHT		
Machine Weight	2,940kg	6,482 lbs

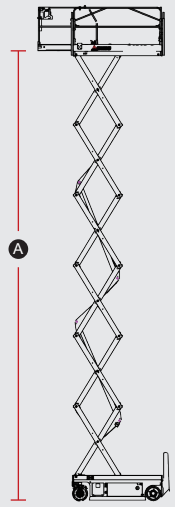





Please contact LGMG or a local dealer for more details.
LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LGMG
RELIABILITY IN ACTION

www.lgmglifts.com

LINGONG HEAVY MACHINERY CO., LTD.
Address: No. 2676, Kejia Road, Jinan, Shandong, China
Email: sales@lgmg.com.cn Tel: +86 531 6787 9283